





Hydrostatic Power Steering System

/ R series forklifts are equipped with a hydrostatic power steering system that works to reduce steering effort and reduce fatigue over long hours of operation. Completely hydraulic in design with no mechanical linkages, the smooth operation of this system helps to eliminate kickback and oversteer characteristics.

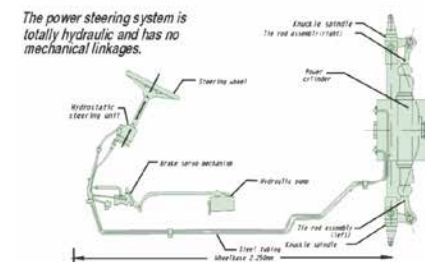

Advanced Technology for Superior All-round Performance

/ W19A&W14B series forklifts are now equipped with a new 2-stage stator torque converter that helps to improve allround work efficiency by providing smoother, fatigue-free operation. Making it unnecessary for the operator to shift from low to high gear (1st-2nd), the 2-stage stator torque converter is designed to eliminate shift shock. This greatly improves operator comfort-especially during long work shifts-and reduces the possibility of rocking the pallet when accelerating the forklift.

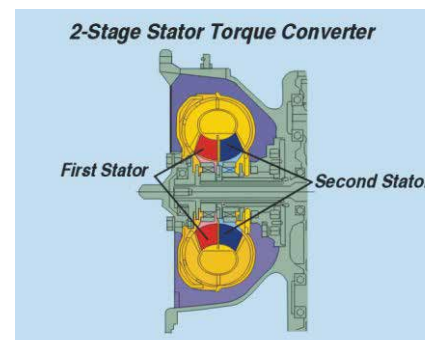

ZHEJIANG HANGCHA IMP. & EXP. CO., LTD.

Factory site: No. 88, Donghuan Rd., Lin'an Economic Development Zone, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755
Fax: +86-571-88132890 88926789

sales@hcforklift.com
www.hcforklift.com



HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.



R Series Diesel Counterbalanced Trucks

with capacities of 5,000 to 7,000kg

The World of Hangcha






R series 5.0-7.0t forklift specification

[illegible]

R series 5.0-7.0t forklift mast specification

Type	Model	max. fork height	Overall height		Free lift	Tilt range		Capacity		
			Lowered	Extended	With backrest	FWD	RWD	load capacity at 600mm		
				With backrest				Double tire		
								5T	6T	7T
		mm	mm	mm	mm	(°)	(°)	kg	kg	kg
Wide view mast	50M, 7M	2500	2250	3920	160	6	12	5000	6000	7000
		2700	2350	4120	160	6	12	5000	6000	7000
		3000	2500	4420	160	6	12	5000	6000	7000
		3300	2650	4720	160	6	12	5000	6000	7000
		3600	2800	5020	160	6	12	5000	6000	7000
		4000	3000	5420	160	6	12	5000	6000	7000
		4300	3200	5720	160	6	6	5000	6000	7000
		4500	3300	5920	160	6	6	5000	6000	7000
		4800	3450	6220	160	6	6	5000	6000	7000
		5000	3550	6420	160	6	6	5000	6000	7000
		5500	3850	6920	160	3	6	4700	5700	6600
		6000	4100	7420	160	3	6	4700	5400	6400
Wide view full free Duplex mast	50U, 7U	2500	2185	3640	1048	6	12	5000	6000	7000
Wide view full free Triplex mast	50N, 7N	4500	2720	5920	1323	6	6	4500	5500	6200
		4800	2820	6220	1423	6	6	4500	5500	6200
		5000	2870	6420	1473	6	6	4500	5500	6200
		5500	3070	6920	1673	3	6	4200	5200	5800
		6000	3220	7420	1823	3	6	4000	5000	5500
		7000	3670	8420	2273	3	6	2900	3300	3600

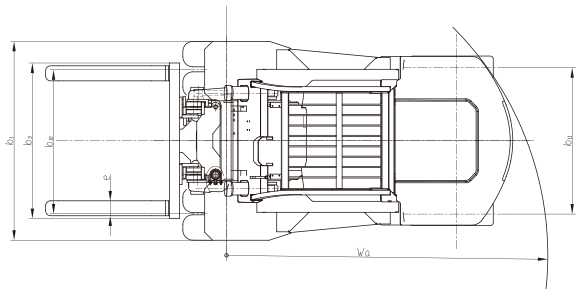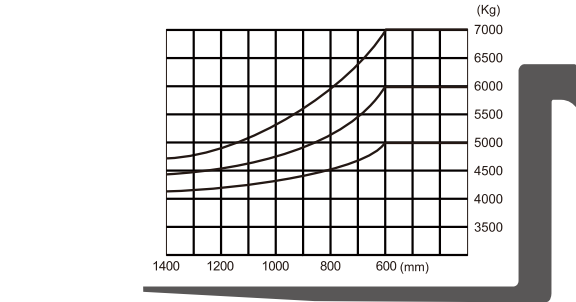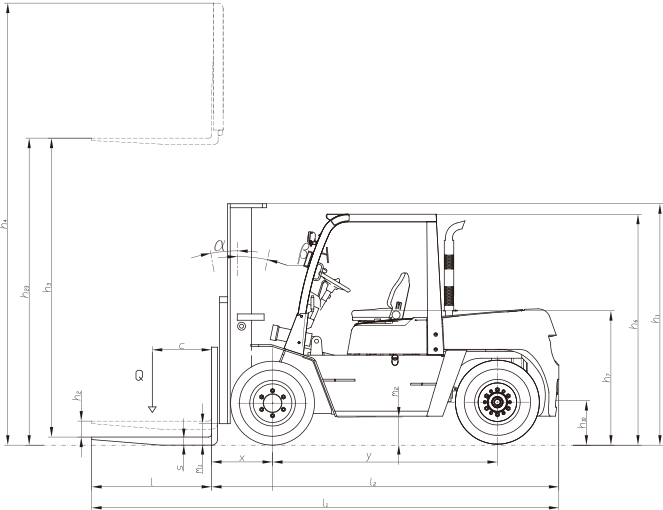

Non-slip Floor and Step

The wide-open step is not only convenient to access but safer thanks to anti-slip mats. To further improve safety in demanding work conditions, the floor board is constructed of embossed steel to reduce the possibility of slipping.



Options

- | | |
|-------------------------------|---|
| 2.5-6.0m duplex mast | / Other attachment |
| Special carriage and backrest | / Fire extinguisher |
| Solid tyre | / Suspension seat |
| Cabin | / Dual air cleaner or special air cleaner |
| Heater and air conditioner | / Rear working light |
| Other dimension forks | / Customer painting |
| Sideshifter | |

