

MAX-8



MAX-8

Excellent Performances & Reliability

**CPC(Q)D15/18/
20/25/30/35T8**
T8 series 1.5–3.5t forklift

EP EQUIPMENT CO.,LTD
www.ep-ep.com

CPC(Q)D15/18T8

T8 series 1.5-1.8t forklift specification

1 Manufacture				CPC(Q)D15T8		CPC(Q)D18T8	
2 Model				CPD15T8-NE92	CPD15T8-S4Q	CPD18T8-NE92	CPD18T8-S4Q
3 Power type				Diesel	Diesel	Diesel	Diesel
4 Rated capacity				1500	1500	1800	1800
5 Load center				500	500	500	500
6 Lift height				3000	3000	3000	3000
7 Free lift height				120	120	120	120
8 Fork size		L×W×T		920×100×35	920×100×35	920×100×35	920×100×35
9 Mast tilt range		F/R		6°/12°	6°/12°	6°/12°	6°/12°
10 Fork overhang (wheel center to fork face)				420	420	420	420
11 Rear overhang				420	420	420	420
12 Length to face of fork				2230	2230	2270	2230
13 Overall width				1080	1080	1080	1080
14 Mast lowered height				1995	1995	1995	1995
15 Mast extended height				3960	3960	3960	3960
16 Overhead guard height				2070	2070	2070	2070
17 Turning radius(outside)				1995	1995	2035	2035
18 Min.right angle stacking aisle width (Add load length and clearance)				2400	2400	2440	2440
19 Travel (No load)				14	14	14	14
20 Speed				460	460	460	460
21 Lowering (Full load)				450	450	450	450
22 Max.Drawbar Pull (Full load)				20500(17500)	20500(17500)	20500(17500)	20500(17500)
23 Max.Gradeability (Full load)				20	20	20	20
24 Tyres		Front		6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
25		Rear		5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR
26 Tread		Front		920	920	920	920
27		Rear		920	920	920	920
28 Wheelbase				1430	1430	1430	1430
29 Ground clearance		Lowest		110	110	110	110
30 Wheelbase center				145	145	145	145
31 Self weight				2700	2700	2900	2900
32 Full load		Front		3570	3570	3995	3995
33 Weight Distribution		Rear		630	630	705	705
34 No load		Front		1215	1215	1305	1305
35 Voltage/Capacity(20HR)		Rear		1485	1485	1595	1595
36 Battery				4TNE92	4TNE92	4TNE92	4TNE92
37 Manufacture				YANMAR	YANMAR	YANMAR	YANMAR
38 Rated output/r.p.m				33/2450	33/2450	33/2450	33/2450
39 Rated torque/r.p.m				136/1600	136/1600	136/1600	136/1600
40 Engine				4	4	4	4
41 No.of cylinder				4	4	4	4
42 Bore×Stroke				88×103	88×103	88×103	88×103
43 Displacement				2659	2659	2659	2659
44 Fuel tank capacity				50	50	50	50
45 Manufacture				CHINA	CHINA	CHINA	CHINA
46 Transmissions				Powershift	Powershift	Powershift	Powershift
47 Stage				1/1	1/1	1/1	1/1
48 Operating pressure		For attachments		17.5	17.5	17.5	17.5

1. Special lifting height available (2-stage mast : 2.5m, 2.7m, 3.0m,3.3m, 3.5m,3.6m, 3.7m,4m,4.3m, 4.5m,5m, Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m, 3-stage mast : 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m)

3. The parameters in the table are of the standard model. For more information, please contact us. 4. Specification are subject to change without notice.

CPC(Q)D20/25T8

T8 series 2.0-2.5t forklift specification

General	1	Manufacture			CPC(Q)D20T8				CPC(Q)D25T8			
		Model			CPCD20T8-S4S	CPCD20T8-C490	OPCD20T8-C240	CPQD20T8-K21	CPCD25T8-C490	CPCD25T8-S4S		
Dimensions	2	Power type			Diesel	Diesel	Diesel	Gasoline	Diesel	Diesel		
	3	Rated capacity		Kg	2000	2000	2000	2000	2500	2500		
	4	Load center		mm	500	500	500	500	500	500		
	5	Lift height		mm	3000	3000	3000	3000	3000	3000		
	6	Free lift height		mm	120	120	120	120	120	120		
	7	Fork size		L×W×T	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40		
	8	Mast tilt range		F/R	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°		
	9	Fork overhang(wheel center to fork face)		mm	476	476	476	476	476	476		
	10	Rear overhang		mm	485	485	485	485	476	476		
	11	Length to face of fork		mm	2610	2610	2610	2610	2660	2660		
Characteristics & Dimensions	12	Overall width		mm	1150	1150	1150	1150	1150	1150		
	13	Mast lowered height		mm	1995	1995	1995	1995	1995	1995		
	14	Mast extended height		mm	4200	4200	4200	4200	4200	4200		
	15	Overhead guard height		mm	2130	2130	2130	2130	2130	2130		
	16	Turning radius(outside)		mm	2170	2170	2170	2170	2230	2230		
Performance	17	Min.right angle stacking aisle width (Add load length and clearance)		mm	2680	2680	2680	2680	2740	2740		
	18	Travel (No load)		Km/h	20	20	20	20	20	20		
	19	Lifting (Full load)		mm/sec	450	450	450	450	450	450		
	20	Lowering (Full load)		mm/sec	450	450	450	450	450	450		
	21	Max.Drawbar Pull (Full load)		N	17500	17500	17500	17500	17500	17500		
Chassis	22	Max.Gradeability (Full load)		%	20	20	20	20	20	20		
	23	Types	Front	mm	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR		
	24		Rear	mm	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR		
	25	Tread	Front	mm	970	970	970	970	970	970		
	26		Rear	mm	970	970	970	970	970	970		
	27	Wheelbase		mm	1600	1600	1600	1600	1600	1600		
	28	Ground clearance	Lowest	mm	120	120	120	120	120	120		
	29		Wheelbase center	mm	145	145	145	145	145	145		
	30	Self weight		Kg	3580	3580	3580	3580	3920	3920		
	31	Full load			4856	4856	4856	4856	5588	5588		
Weight	32	Weight Distribution	Front	mm	724	724	724	724	832	832		
	33		Rear	mm	1428	1428	1428	1428	1560	1560		
	34	No load			2152	2142	2142	2142	2360	2360		
	35	Battery	Voltage/Capacity(20HR)	V/AH	12/60	12/80	12/80	12/80	12/80	12/60		
	36		Modal		S4S-DPC	C490BPG-25	C240	K21	C490BPG-25	A498BT1-39		
	37	Rated output/r.p.m		kw	35.3/2250	36.8/2650	34.5/2500	31.2/2250	36.8/2650	35.3/2250		
	38	Rated torque/r.p.m		N.m	177/1700	156/1500	139/1800	143.7/1600	156/1500	177/1700		
	39	Engine	No of cylinder		4	4	4	4	4	4		
	40		Bore×Stroke	mm	94×120	90×105	86×102	89×83	90×105	94×120		
	41	Displacement		cc	3331	2670	2369	2065	2670	3331		
Power & transmission	42	Fuel tank capacity		L	60	60	70	60	60	60		
	43	Transmissions	Manufacture		CHINA	CHINA	CHINA	CHINA	CHINA	CHINA		
	44		Type		Powershift	Powershift	Powershift	Powershift	Powershift	Powershift		
	45	Operating pressure	For attachments	Mpa	17.5	17.5	17.5	17.5	17.5	17.5		
	46		Stage		1/1	1/1	1/1	1/1	1/1	1/1		
	47	FWD/RVS										
	48	Special lifting height available (2-stage mast : 2.5m, 2.7m, 3.0m,3.3m, 3.5m,3.6m, 3.7m,4m,4.3m, 4.5m,5m; Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m, 3-stage mast : 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m)										
		3. The parameters in the table are of the standard model. For more information, please contact us.										
		4. Specification are subject to change without notice.										
		2. Attachment available.										

1. Special lifting height available (2-stage mast : 2.5m, 2.7m, 3.0m,3.3m, 3.5m,3.6m, 3.7m,4m,4.3m, 4.5m,5m; Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m, 3-stage mast : 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m)

3. The parameters in the table are of the standard model. For more information, please contact us.

4. Specification are subject to change without notice.

2. Attachment available.

CPC(Q)D30/35T8

T8 series 3.0-3.5t forklift specification

General	1		Manufacture		CPC(Q)D30T8				CPC(Q)D35T8			
	2	3	Model		CPCD30T8-C490	CPCD30T8-S4S	CPCD30T8-C240	CPQD30T8-K25	CPCD35T8-S4S	CPCD35T8-A498	CPQD35T8-K25	
Dimensions	4	5	Power type		Diesel	Diesel	Diesel	Gasoline	Diesel	Diesel	Gasoline	
	6	7	Rated capacity	Kg	3000	3000	3000	3000	3500	3500	3500	
	8	9	Load center	mm	500	500	500	500	500	500	500	
	10	11	Lift height	mm	3000	3000	3000	3000	3000	3000	3000	
	12	13	Free lift height	mm	120	120	120	120	120	120	120	
	14	15	Fork size	L×W×T	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×50	1070×125×50	1070×125×50	
	16	17	Mast tilt range	F/R	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	
Characteristics & Dimensions	18	19	Fork overhang(wheel center to fork face)	mm	481	481	481	481	486	486	486	
	20	21	Rear overhang	mm	590	590	590	590	590	590	590	
	22	23	Length to face of fork	mm	2762	2762	2762	2762	2822	2822	2822	
	24	25	Overall width	mm	1200	1200	1200	1200	1200	1200	1200	
	26	27	Mast lowered height	mm	2005	2005	2005	2005	2005	2005	2005	
	28	29	Mast extended height	mm	4210	4210	4210	4210	4210	4210	4210	
	30	31	Overhead guard height	mm	2180	2180	2180	2180	2180	2180	2180	
Performance	32	33	Turning radius(outside)	mm	2450	2450	2450	2450	2510	2510	2510	
	34	35	Min.right angle stacking aisle width (Add load length and clearance)	mm	2950	2950	2950	2950	3010	3010	3010	
	36	37	Travel (No load)	Km/h	20	20	20	20	20	20	20	
	38	39	Lifting (Full load)	mm/sec	400	400	400	400	400	400	400	
	40	41	Lowering (Full load)	mm/sec	400	400	400	400	400	400	400	
	42	43	Max Drawbar Pull (Full load)	N	21000	21000	21000	21000	21500	21500	21500	
	44	45	Max Gradeability (Full load)	%	20	20	20	20	20	20	20	
Chassis	46	47	Tyres	mm	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	
	48	49	Front	mm	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	
	50	51	Rear	mm	1010	1010	1010	1010	1010	1010	1010	
	52	53	T read	mm	980	980	980	980	980	980	980	
	54	55	Wheelbase	mm	1700	1700	1700	1700	1760	1760	1760	
	56	57	Lowest	mm	140	140	140	140	140	140	140	
	58	59	Wheelbase center	mm	175	175	175	175	175	175	175	
Weight	60	61	Self weight	Kg	4450	4450	4450	4450	4700	4700	4700	
	62	63	Full load	mm	6488	6488	6488	6488	7134	7134	7134	
	64	65	Rear	mm	962	962	962	962	1066	1066	1066	
	66	67	Front	mm	1810	1810	1810	1810	1927	1927	1927	
	68	69	No load	mm	2640	2640	2640	2640	2773	2773	2773	
	70	71	Voltage/Capacity(20HR)	V/AH	12/60	12/60	12/60	12/60	12/60	12/60	12/60	
	72	73	Modal		S4S-DPC	S4S-DPC	C240	K25	S4S-DPC	A498BT1-39	K25	
Power & transmission	74	75	Manufacture		Mitsubishi	Mitsubishi	ISUZU	Nissan	Mitsubishi	CHINA	Nissan	
	76	77	Rated output/r.p.m	kw	35.3/2250	36.8/2650	34.5/2500	37.4/2300	35.3/2250	36.8/2400	37.4/2300	
	78	79	Rated torque/r.p.m	N.m	177/1700	156/1500	139/1800	176.5/1600	177/1700	186/1700	176.5/1600	
	80	81	No of cylinder		4	4	4	4	4	4	4	
	82	83	Bore×Stroke	mm	94×120	90×105	86×102	89×100	94×120	98×105	89×100	
	84	85	Displacement	cc	3331	2670	2488	2488	3331	3168	2488	
	86	87	Fuel tank capacity	L	70	70	70	70	75	75	75	
Transmissions	88	89	Manufacture		CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	
	90	91	Type		Powershift	Powershift	Powershift	Mechanical	Powershift	Powershift	Powershift	
	92	93	Stage		1/1	1/1	1/1	1/1	1/1	1/1	1/1	
	94	95	FWD/RVS									
	96	97	For attachments									
	98	99	Operating pressure	Mpa	17.5	17.5	17.5	17.5	17.5	17.5	17.5	
	100	101										

1. Special lifting height available (2-stage mast : 2.5m, 2.7m, 3.0m,3.3m, 3.5m,3.6m, 3.7m,4m,4.3m, 4.5m,5m. Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m, 3-stage mast : 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m)
2. Attachment available.
3. The parameters in the table are of the standard model. For more information, please contact us. 4. Specification are subject to change without notice.

1.5~1.8t T8 series mast: (pneumatic)

Type	Model	Max. fork height	Overall height			Free lift		Front Overhang		Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest	1.5t	1.8t	FWD	BWD	Load capacity at 500 mm			
				Without backrest	With backrest							Single tire		Double tire	
			mm	mm	mm	mm	mm	mm	mm	Deg	Deg	1.5t	1.8t	1.5t	1.8t
Wide view mast	2W200	2000	1495	2585	2955	120	120	420	420	6	12	1500	1800	1500	1800
	2W250	2500	1745	3085	3455	120	120	420	420	6	12	1500	1800	1500	1800
	2W270	2700	1845	3285	3655	120	120	420	420	6	12	1500	1800	1500	1800
	2W300	3000	1995	3585	3955	120	120	420	420	6	12	1500	1800	1500	1800
	2W330	3300	2145	3885	4255	120	120	420	420	6	12	1500	1800	1500	1800
	2W350	3500	2245	4085	4455	120	120	420	420	6	12	1500	1800	1500	1800
	2W360	3600	2295	4185	4555	120	120	420	420	6	12	1500	1800	1500	1800
	2W400	4000	2545	4585	4955	120	120	420	420	6	12	1400	1700	1500	1800
	2W430	4300	2695	4885	5255	120	120	420	420	6	6	1300	1600	1400	1700
	2W450	4500	2795	5085	5455	120	120	420	420	6	6	1250	1500	1350	1600
Wide view full 2-stage mast	2F250	2500	1790	3105	3455	1045	765	420	420	6	12	1500	1800	1500	1800
	2F270	2700	1890	3305	3655	1145	865	420	420	6	12	1500	1800	1500	1800
	2F300	3000	2040	3605	3955	1345	1105	420	420	6	12	1500	1800	1500	1800
	2F330	3300	2190	3905	4255	1495	1165	420	420	6	12	1500	1800	1500	1800
	2F360	3600	2340	4205	4555	1645	1315	420	420	6	12	1500	1800	1500	1800
	2F400	4000	2540	4605	4955	1815	1565	420	420	6	12	1400	1700	1500	1800
	3F430	4300	1985	5070	5255	1425	1080	440	440	6	6	1250	1500	1350	1600
	3F450	4500	2045	5130	5465	1485	1140	440	440	6	6	1200	1400	1300	1500
	3F480	4800	2160	5445	5755	1575	1230	440	440	6	6	1100	1300	1200	1400
	3F500	5000	2210	5605	5955	1665	1320	440	440	6	6	1050	1200	1150	1300
Wide view full 3-stage mast	3F550	5500	2375	6120	6455	1825	1480	440	440	3	6	/	/	950	1100
	3F600	6000	2600	6695	6955	1975	1630	440	440	3	6	/	/	750	900

Note: 1. With sideshifter minus 150Kg, with integral sideshifter minus 100Kg.

2.0~2.5t T8 series mast: (pneumatic)







Type	Model	Max. fork height	Overall height			Free lift		Front Overhang		Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest	2.0t	2.5t	FWD	BWD	Load capacity at 500 mm			
				Without backrest	With backrest							Single tire		Double tire	
			mm	mm	mm	mm	mm	mm	mm	Deg	Deg	2.0t	2.5t	2.0t	2.5t
Wide view mast	2W200	2000	1585	2740	3420	120	120	476	476	6	12	2000	2500	2000	2500
	2W250	2500	1725	3040	3720	120	120	476	476	6	12	2000	2500	2000	2500
	2W270	2700	1825	3240	3920	120	120	476	476	6	12	2000	2500	2000	2500
	2W300	3000	1995	3540	4220	120	120	476	476	6	12	2000	2500	2000	2500
	2W330	3300	2145	3690	4370	120	120	476	476	6	12	2000	2500	2000	2500
	2W350	3500	2245	3890	4570	120	120	476	476	6	12	2000	2500	2000	2500
	2W360	3600	2295	3990	4670	120	120	476	476	6	12	2000	2500	2000	2500
	2W400	4000	2495	4040	4720	120	120	476	476	6	12	1900	2300	2000	2500
	2W430	4300	2645	4340	5020	120	120	476	476	6	6	1800	2100	1950	2450
	2W450	4500	2745	4290	4970	120	120	476	476	6	6	1700	2000	1900	2400
Wide view full 2-stage mast	2F250	2500	1800	3150	3530	1210	560	476	476	6	12	2000	2500	2000	2500
	2F270	2700	1900	3350	3730	1310	660	476	476	6	12	2000	2500	2000	2500
	2F300	3000	2050	3650	4030	1460	810	476	476	6	12	2000	2500	2000	2500
	2F330	3300	2200	3950	4330	1610	960	476	476	6	12	2000	2500	2000	2500
	2F360	3600	2350	4250	4630	1760	1110	476	476	6	12	2000	2500	2000	2500
	2F400	4000	2550	4650	5030	2060	1410	476	476	6	12	1900	2300	2000	2500
	3F430	4300	1970	4880	5560	1360	730	490	490	6	6	1700	2000	1900	2400
	3F450	4500	2050	5040	5720	1460	810	490	490	6	6	1600	1900	1800	2300
	3F480	4800	2095	5345	6020	1565	915	490	490	6	6	1500	1700	1700	2100
	3F500	5000	2240	5540	6220	1610	960	490	490	6	6	1400	1600	1600	2000
Wide view full 3-stage mast	3F550	5500	2320	6120	6800	1770	1120	490	490	3	6	1050	1200	1500	1800
	3F600	6000	2740	6540	7220	2020	1370	490	490	3	6	700	800	1400	1600

Note: 1. With sideshifter minus 150Kg, with integral sideshifter minus 100Kg.

3.0~3.5t T8 series mast: (pneumatic)

Type	Model	Max. fork height	Overall height			Free lift		Front Overhang		Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest	3.0t	3.5t	FWD	BWD	Load capacity at 500 mm			
				Without backrest	With backrest							Single tire	Double tire	Single tire	Double tire
			mm	mm	mm	mm	mm	mm	mm	Deg	Deg	3.0t	3.5t	3.0t	3.5t
Wide view mast	2W200	2000	1575	2570	3250	120	120	481	486	6	12	3000	3000	3500	3500
	2W250	2500	1825	3070	3750	120	120	481	486	6	12	3000	3000	3500	3500
	2W270	2700	1925	3270	3950	120	120	481	486	6	12	3000	3000	3500	3500
	2W300	3000	2075	3570	4250	120	120	481	486	6	12	3000	3000	3500	3500
	2W330	3300	2225	3690	4370	120	120	481	486	6	12	3000	3000	3500	3500
	2W350	3500	2325	3890	4570	120	120	481	486	6	12	3000	3000	3500	3500
	2W360	3600	2375	3990	4670	120	120	481	486	6	12	3000	3000	3500	3500
	2W400	4000	2625	4040	4720	120	120	481	486	6	12	2850	3000	3250	3500
	2W430	4300	2775	4340	5020	120	120	481	486	6	6	2700	2900	3000	3400
	2W450	4500	2875	4290	4970	120	120	481	486	6	6	2550	2850	2850	3350
Wide view full 2-stage mast	2F250	2500	1805	3180	3560	1210	560	481	486	6	12	3000	3000	3500	3500
	2F270	2700	1905	3380	3760	1310	660	481	486	6	12	3000	3000	3500	3500
	2F300	3000	2055	3680	4060	1460	810	481	486	6	12	3000	3000	3500	3500
	2F330	3300	2205	3980	4360	1610	960	481	486	6	12	3000	3000	3500	3500
	2F360	3600	2355	4280	4660	1760	1110	481	486	6	12	3000	3000	3500	3500
	2F400	4000	2605	4680	5060	2060	1410	481	486	6	12	2850	3000	3250	3500
	3F430	4300	2055	4910	5570	1360	730	495	500	6	6	2550	2850	2850	3350
	3F450	4500	2135	5070	5750	1460	810	495	500	6	6	2400	2700	2700	3200
	3F480	4800	2240	5375	6050	1565	915	495	500	6	6	2250	2550	2450	2950
	3F500	5000	2325	5570	6250	1610	960	495	500	6	6	1650	2250	2300	2800
Wide view full 3-stage mast	3F550	5500	2575	6150	6830	1770	1120	495	500	3	6	1800	2250	1800	2550
	3F600	6000	2825	6570	7250	2020	1370	495	500	3	6	1200	2100	1300	2300

Note: 1. With sideshifter minus 200Kg, with integral sideshifter minus 150Kg.

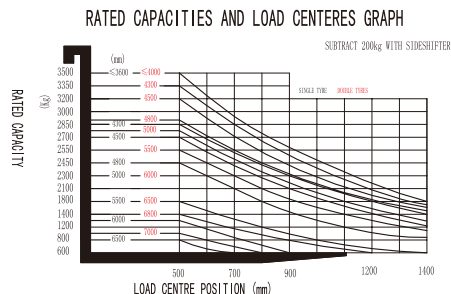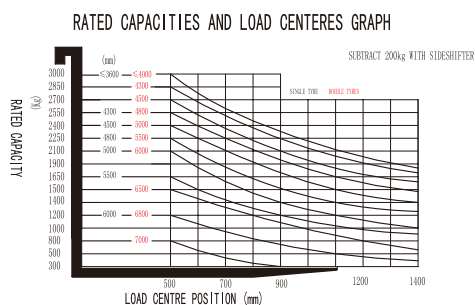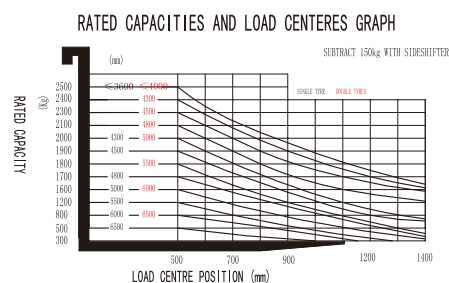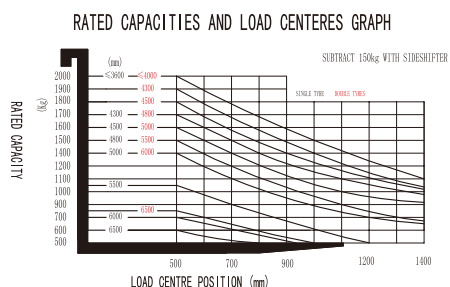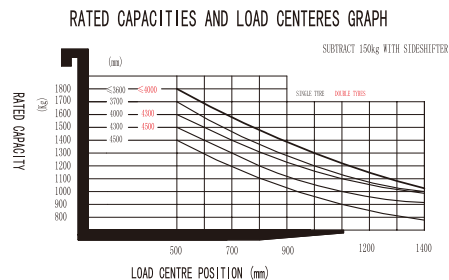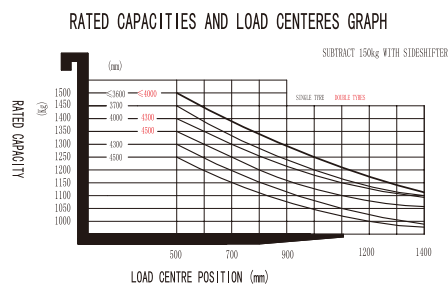

Options	CPC(Q)D15/18T8	CPC(Q)D20/25T8	CPC(Q)D30T8	CPC(Q)D35T8
Other dimension forks	●	●	●	●
fork extension	●	●	●	●
Okamura Transmission	●	●	●	●
LPG system	●	●	●	●
High-mounted exhaust system	●	●	●	●
Middle-mounted exhaust system	●	●	●	●
Dual air cleaners or special air cleaner	●	●	●	●
Solid tyre	●	●	●	●
Non-mark tyre	●	●	●	●
Fork weighing system	●	●	●	●
Special overhead guard height	●	●	●	●
Different lifting height masts	●	●	●	●
PVC shed	●	●	●	●
Side shift	●	●	●	●
Other attachment	●	●	●	●
Cabin	●	●	●	●
Heater	●	●	●	●
Fan	●	●	●	●
Front window with wiper	●	●	●	●
Rear window with wiper	●	●	●	●
Cabin without side doors	●	●	●	●
Fire extinguisher	●	●	●	●
Full suspension seat	●	●	●	●
Dual drive wheels with fender	●	●	●	●
Rear working light	●	●	●	●
OPS system	●	●	●	●
Special carriage and backrest	●	●	●	●

